

SEALSTOP


SEAL
DETERRENCE
SYSTEM

INSTALLATION GUIDELINES FOR DUO, TRIO AND QUAD SEALSTOP UNITS:

Line up on a pair of ratchet strap or use screws/bolts/rivets. Once installed, small screws or rivets maybe used to lock the position of units on the strap.


Spacing: 12" on center.

Install units always perpendicular to the perimeter of the area to be protected. Install right on water's edge on docks, in the middle on swim steps.

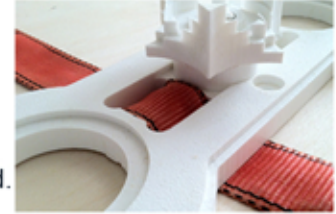


Straight swim platforms:

Line up on ratchet strap using same slots

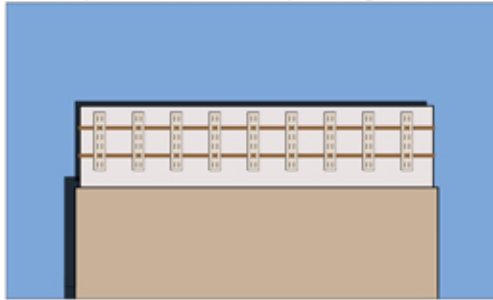


Curved swim platforms:

Follow curvature by off-setting slots

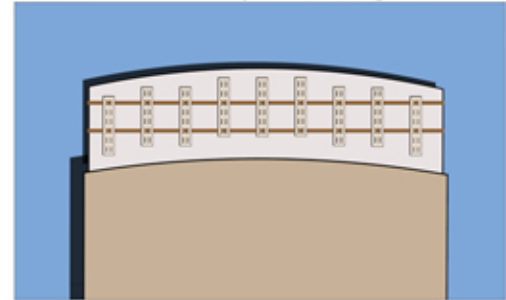

Deep swim platforms:

Install on all water-facing perimeter

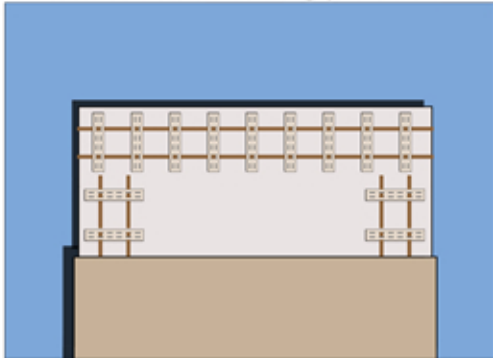

Decks, Docks and larger surfaces:

Install on all water-facing perimeter



WARNING!

SealStop units have sharp edges and rotating elements.

Do not touch or step on SealStop units.

They are slippery, wet or dry, and pose a trip hazard.

Installed areas should be clearly marked and warning signs should be installed to alert about these dangers.

SealStop, Inc. shall not be liable for any special or consequential damages that result from the use of, or the inability to use, SealStop products or the performance of these products, even if SealStop, Inc. has been advised of the possibility of such damages.